


| COLUMN SCHEDULE | | | | | | |
|-----------------|-------------|--------|----------|--------|--------|----------------|
| FLR | VARIES | VARIES | VARIES | VARIES | VARIES | VARIES |
| T/Roof FLR | 6-2" | 6-2" | 6-2" | 6-2" | 6-2" | 6-2" |
| T/7th FLR | 8-11" | 8-11" | 8-11" | 8-11" | 8-11" | 8-11" |
| T/6th FLR | 8-11" | 8-11" | 8-11" | 8-11" | 8-11" | 8-11" |
| T/5th FLR | 8-11" | 8-11" | 8-11" | 8-11" | 8-11" | 8-11" |
| T/4th FLR | 8-11" | 8-11" | 8-11" | 8-11" | 8-11" | 8-11" |
| T/3rd FLR | 8-11" | 8-11" | 8-11" | 8-11" | 8-11" | 8-11" |
| T/2nd FLR | VARIES | VARIES | VARIES | VARIES | VARIES | VARIES |
| T/1st FLR | 11-0" | 11-0" | 11-0" | 11-0" | 11-0" | 11-0" |
| T/Cellar FLR | | | | | | |
| QTY | 4 | 2 | 3 | 1 | 1 | 5 |
| COLUMN MARK | 21,22,23,24 | 25,26 | 28,30,31 | 29 | 32 | 33,35,36,37,38 |


| FLR | VARIES | VARIES | VARIES | VARIES | VARIES | VARIES |
|--------------|-------------|--------|--------|--------|--------|----------------|
| T/Roof FLR | 10-12" | 10-12" | 10-12" | 10-12" | 10-12" | 10-12" |
| T/7th FLR | 9-2" | 9-2" | 9-2" | 9-2" | 9-2" | 9-2" |
| T/6th FLR | 9-2" | 9-2" | 9-2" | 9-2" | 9-2" | 9-2" |
| T/5th FLR | 9-2" | 9-2" | 9-2" | 9-2" | 9-2" | 9-2" |
| T/4th FLR | 9-2" | 9-2" | 9-2" | 9-2" | 9-2" | 9-2" |
| T/3rd FLR | 9-2" | 9-2" | 9-2" | 9-2" | 9-2" | 9-2" |
| T/2nd FLR | 10-2" | 10-2" | 10-2" | 10-2" | 10-2" | 10-2" |
| T/1st FLR | VARIES | VARIES | VARIES | VARIES | VARIES | VARIES |
| T/Cellar FLR | | | | | | |
| QTY | 6 | 1 | 1 | 1 | 1 | 2 |
| COLUMN MARK | 1,3,5,6,7,9 | 2 | 4 | 8 | C1 | C2a C2b C2c C3 |

| Bar Mark | Qty | Size | Total Length | Typ | H | W | C | D | E | F | G | H | I | J | K | L | M | N | O | P | Q | R | S | T | U | V | W | X | Y | Z |
|----------|------|------|--------------|-----|-----|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 3P5 | 24 | #3 | 1-71 | 79 | 0-4 | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3P9 | 152 | #3 | 1-51 | 79 | 0-4 | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3P11 | 1195 | #3 | 1-71 | 79 | 0-4 | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3P21 | 12 | #3 | 2-51 | 79 | 0-4 | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3T509 | 241 | #3 | 3-91 | 72 | 0-4 | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3T929 | 56 | #3 | 3-81 | 72 | 0-4 | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3T109 | 12 | #3 | 5-81 | 72 | 0-4 | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3T121 | 1195 | #3 | 6-91 | 72 | 0-4 | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4P11 | 452 | #4 | 1-71 | 79 | 0-4 | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4P21 | 64 | #4 | 2-51 | 79 | 0-4 | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4T113 | 141 | #4 | 4-81 | 72 | 0-4 | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4T121 | 311 | #4 | 6-91 | 72 | 0-4 | | | | | | | | | | | | | | | | | | | | | | | | | |
| 7L811 | 66 | #7 | 10-11 | 2 | 1-2 | | | | | | | | | | | | | | | | | | | | | | | | | |
| 7L909 | 42 | #7 | 10-11 | 2 | 1-2 | | | | | | | | | | | | | | | | | | | | | | | | | |
| 7L1009 | 52 | #7 | 11-11 | 2 | 1-2 | | | | | | | | | | | | | | | | | | | | | | | | | |
| 7L1309 | 8 | #7 | 14-11 | 2 | 1-2 | | | | | | | | | | | | | | | | | | | | | | | | | |
| 8L909 | 12 | #8 | 11-11 | 2 | 1-4 | | | | | | | | | | | | | | | | | | | | | | | | | |
| 8L809 | 48 | #8 | 10-41 | 2 | 1-2 | | | | | | | | | | | | | | | | | | | | | | | | | |

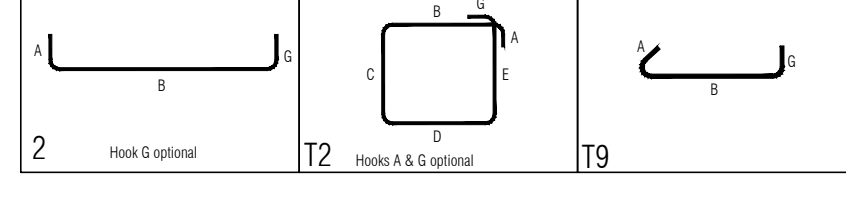

COMPRESSION LAP SCHEDULE:
As per DWG S-402 Lap Schedule (5000 PSI)

| BAR# | LENGTHS |
|------|---------|
| #3 | 1'-0" |
| #4 | 1'-3" |
| #5 | 1'-7" |
| #6 | 1'-11" |
| #7 | 2'-3" |
| #8 | 2'-6" |
| #9 | 2'-10" |
| #10 | 3'-3" |
| #11 | 5'-2" |

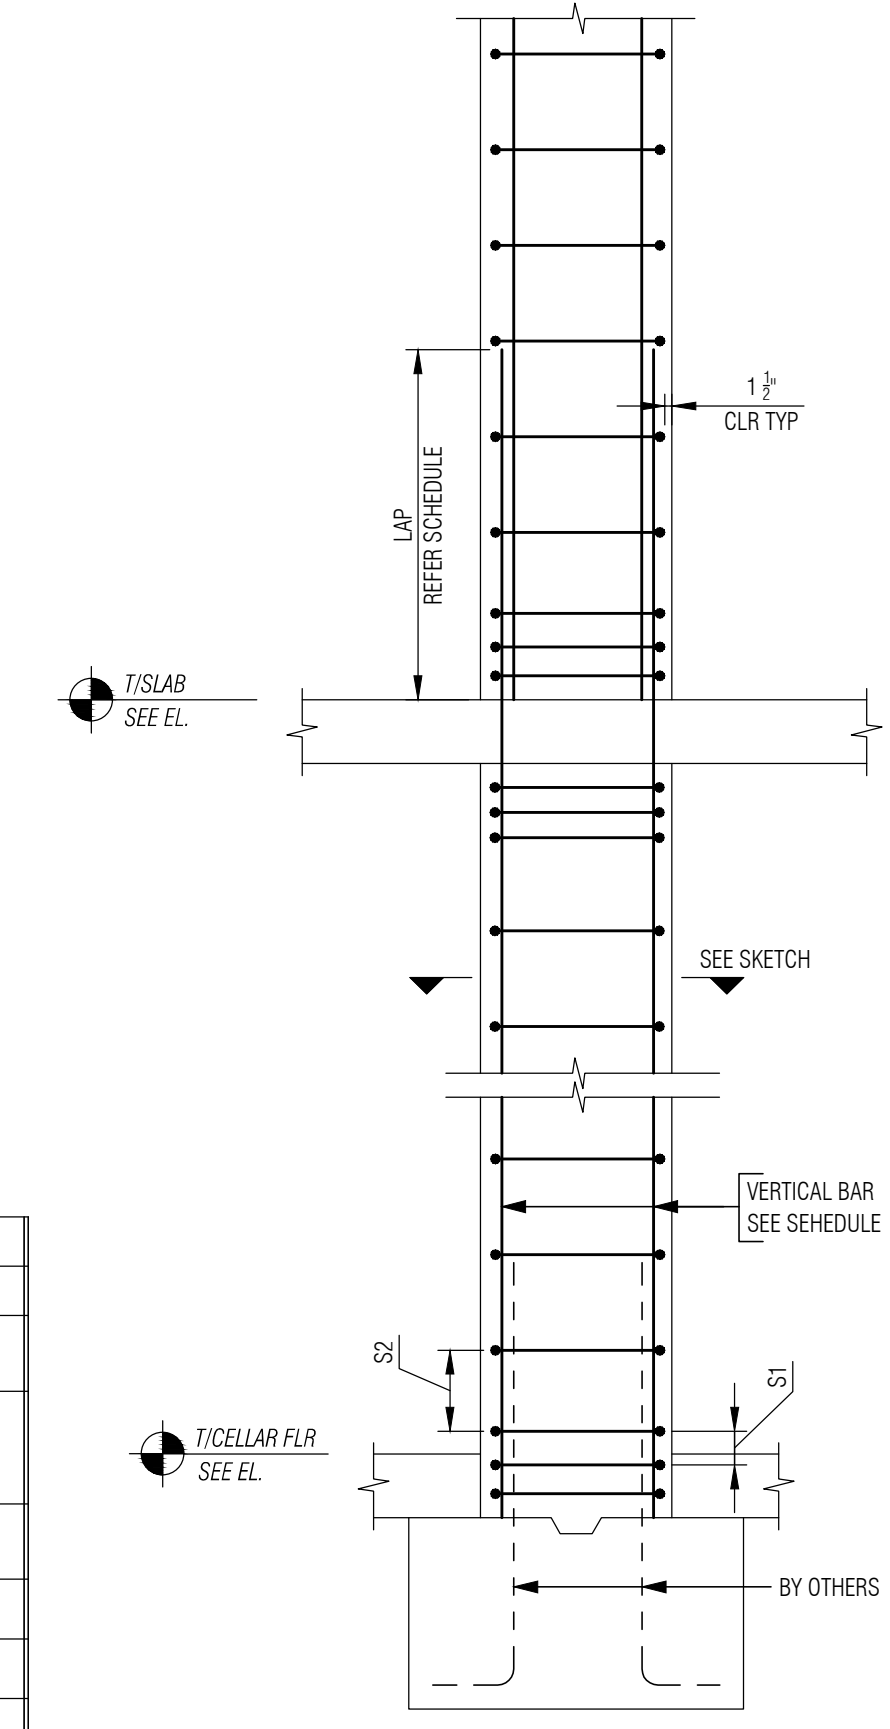

U.O.N. ALL REINF ON THIS DWG IS
BLACK UNCOATED REBAR

- LEGEND**
- AB: Addl. Bottom
 - ADDL: Additional Bar
 - CB: Corner Bar
 - COL: Column
 - DV: Dowel Vertical
 - EMBD: Embedment
 - EF: Each Face
 - EW: Each Way
 - GB: Grade Beam
 - IF: Inside Face
 - OPNG: Opening
 - OF: Outside Face
 - TT: Top of Top
 - WVF: Welded Wire Fabric
 - UON: Unless Otherwise Noted
 - ALT: Alternate
 - B: Bottom
 - CLR: Clear
 - DWLS: Dowels
 - EL: Elevation
 - ES: Each Side
 - FTG: Footing
 - H: Horizontal
 - LW: Long Way
 - OC: On Center
 - REF: Reference
 - SW: Short Way
 - TYP: Typical
 - VERT: Vertical

ASTM A615 (60 BLACK)
REF: S-001.01
NOTE: This Placing Dwg is for rebar placing purposes only. Do Not Scale. Use Placing Dwg in conjunction with contract plans & specs. Info contained within Placing Dwg is not for construction, unless the engineer or contractor approves it.

OMNI REBAR
Rebar Detailing Services
Omni Rebar Inc.
293 Castle Ave, Suite 1c
Westbury, NY 11590
516.544.4333

Customer: _____
Project: _____
Location: _____
Title: **1st - Roof Column Reinforcement Schedule**

Job: -
OR: _____

RC01

